



TR Automatyka Sp. z o. o.

ul. Lechicka 14 ; 02-156 Warszawa

Series
A4

Differential Pressure Switch

Adjustable Set Point, High Overpressure

Tel. (+48 022) 886 10 16

Fax. (+48 022) 846 50 37


www.trautomatyka.pl

biuro@trautomatyka.pl



PRESSURE

Differential Pressure Switches

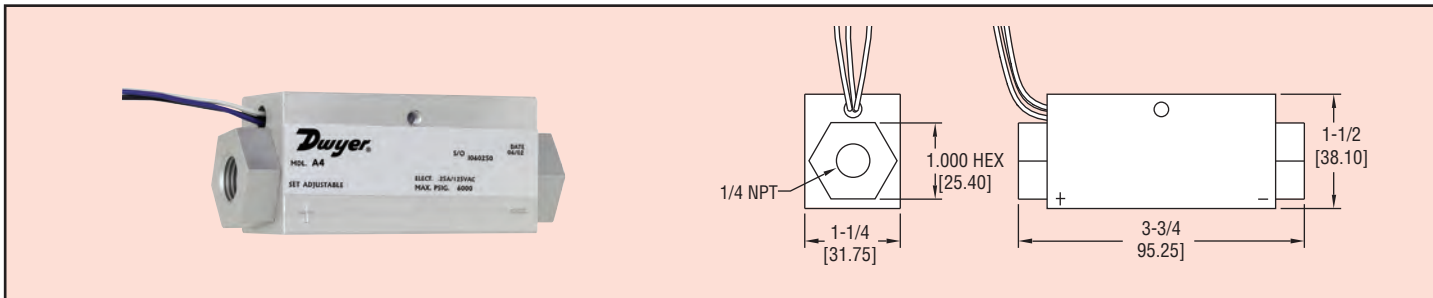

Rugged Series A4 Differential Pressure Switch offers field adjustments and can handle system pressures up to 6000 psig. Piston design allows mounting in any orientation. The switch is capable of carrying moderate shock and vibratory loads.

SPECIFICATIONS

Service: Compatible gases.

Wetted Materials: Body, piston, and fittings: anodized aluminum; spring: steel.

Temperature Limits: -65 to 225°F (-54 to 107°C).

Pressure Limits: 2000 psid (138 bar), 6000 psig (413 bar).

Repeatability: See table.

Switch Type: SPDT.

Electrical Rating: AC: 3 VA, 0.25A @ 120 VAC; DC: 5 VA, 0.25A @ 175 VDC.

Electrical Connection: 24 AWG X 12" (30.5 cm) wire leads.

Process Connection: 1/4" female NPT.

Mounting Orientation: Any.

Set Point Adjustment: See table.

Weight: 8.5 oz (241 g).

Agency Approvals: CE.

Model	Repeatability psi (bar)	Set Point psid (bar)	
		Increasing	Decreasing
A4-1	±2 (.14)	7-13 (.48-.89)	2-7 (.14-.48)
A4-2	±4 (.28)	13-25 (.89-1.7)	5-16 (.34-1.1)
A4-3	±8 (.55)	25-45 (1.7-3.1)	10-21 (.68-1.5)
A4-4	±16 (1.1)	35-160 (2.4-11.0)	20-80 (1.4-5.5)
A4-5	±32 (2.2)	120-250 (8.3-17.2)	35-120 (2.4-8.3)