

Z-LINE

Z109UI2

DC Current / Voltage Converter

Z-LINE

Standard converters



CE

- ▶ INPUT: N.1 Ch. current bipolar selectable up to 20 mA (resolution 1µA) or voltage from 100mV up to 20V
- ▶ OUTPUT: N.1 Ch. current 0/4..20 mA or voltage 0/2..10 Vdc
- ▶ Response time: 35ms
- ▶ Power for 2-wire transducers, 20 Vdc
- ▶ Galvanic isolation @ 3-way
- ▶ Power supply: 9..40 Vdc, 19..28 Vac


TECHNICAL DATA

Z109UI2 – DC Current / Voltage Converter



CE

Dimensions

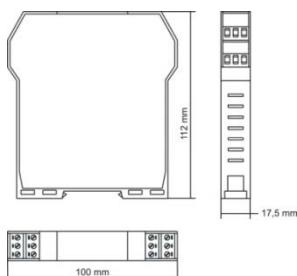

ORDER CODE

Z109UI2

DC Current / Voltage Converter

GENERAL FEATURES

Power supply	9÷40Vdc, 19÷28 Vac
Channels	N.1
Accuracy	0,1%
Response time	35 ms
Galvanic Isolation	Power supply // input // output at 1500 Vac, digital
Resolution	11 bit
Power consumption	2,5 W
Protections	Surges: 400W/ms. Loop supply short-circuit protected
Protection for inputs	Except current: 60V continuous; current 200mA continuous
Humidity	30..90% a +40°C (not condensing)

Design Terminal housing for mounting on 35 mm DIN 46277

DIP Switch - Inputs signal setup
- Output signal setup

Enclosure "V0" self-extinguishing glass filled nylon case

Dimensions 17,5 x 100 x 112 mm (w x h x d)

Weight 140 g

Operating temperature -20..60 °C


Connections Plug-in screw clamp terminal blocks, wires up to 2.5 mm²

IP Protection IP 20


Standards EN50081-2, EN50082-2, EN61010-1

Approval CE

DIP SWITCH CONFIGURATION

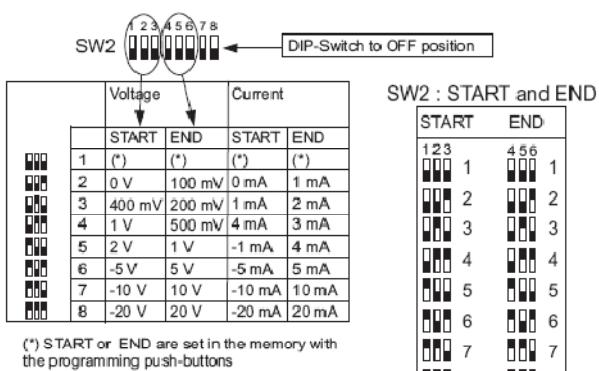

APPLICATION CASE

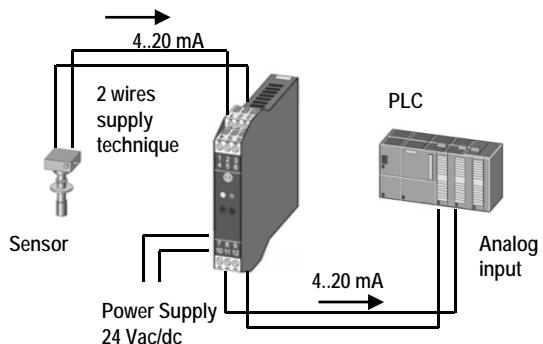


CONNECTIONS

POWER SUPPLY

2 19 ÷ 28 Vac
10 ÷ 40 Vdc
2.5 W Max


INPUT

Current – passive input




The loop is powered by the sensor

Current – active input




The loop is powered by the module

Voltage – input




OUTPUT

Current – active output



Current – passive output



Voltage

