



DMP 304

Industrial Pressure Transmitter for Ultra High Pressure

accuracy according to IEC 60770:
standard: 0.5 % FSO
option: 0.25 % FSO

Nominal pressure

from 0 ... 2 000 bar up to 0 ... 6 000 bar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 10 V (on request)

Special characteristics

- ▶ adjustability of offset and span via front sided potentiometers
- ▶ pressure port 9/16" UNF
- ▶ 80 % calibration signal with MIL / Bendix plug

Optional versions

- ▶ IS-version:
Ex ia = intrinsically safe for gases
- ▶ accuracy according to IEC 60770:
0.25 % FSO
- ▶ pressure port M20x1.5 and M16x1.5

The ultra-high-pressure transmitter type DMP 304 has been especially designed for applications with highest demand on precision and reliability. DMP 304 series is based on a compensated strain gauge, bonded onto a stainless steel diaphragm.

Due to the rugged stainless steel housing usage under extreme conditions and in IS-required areas is no problem.

Preferred areas of use are



hydraulic circuits



water jet cutting



high pressure applications in chemical and petrochemical industry



DMP 304

Ultra High Pressure Transmitter

Technical Data

Input pressure range					
Nominal pressure gauge	[bar]	2 000	4 000	5 000	6 000
Overpressure	[bar]	3 000	5 000	6 000	7 000
Burst pressure	[bar]	4 000	8 000	10 000	10 000
Output signal / Supply					
Standard	2-wire:	4 ... 20 mA / V _S = 10 ... 30 V _{DC}			
IS-protection	2-wire:	4 ... 20 mA / V _S = 10 ... 28 V _{DC}			
Option 3-wire (on request)	3-wire:	0 ... 10 V / V _S = 14 ... 36 V _{DC}			
Performance					
Accuracy ¹	standard: ≤ ± 0.50 % FSO option: ≤ ± 0.25 % FSO (on request)				
Permissible load	current 2-wire: R _{max} = [(V _S – V _{S min}) / 0.02 A] Ω voltage 3-wire: R _{min} = 10 kΩ				
Influence effects	supply 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ				
Long term stability	≤ ± 0.2 % FSO / year at reference conditions				
Response time	< 2.5 msec				
Adjustability	Via a front sided potentiometer is an adjustment of the offset possible within the range of ± 5 % of the nominal pressure range, without an influence of characteristic curve and accuracy.				
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)					
Calibration (only with MIL / Bendix plug)					
Calibration signal accuracy	≤ ± 0.25 % FSO				
Calibration	80 % FSO calibration (e.g. for 4 ... 20 mA / 2-wire: signal = 0.8*16 mA + 4 mA = 16.8 mA)				
Thermal effects (Offset and Span)					
Thermal error	≤ ± 0.2 % FSO / 10 K in compensated range -20 ... 85 °C				
Permissible temperatures					
Permissible temperatures	medium:	-40 ... 85 °C			
	electronics / environment:	-25 ... 85 °C			
	storage:	-40 ... 85 °C			
Electrical protection					
Short-circuit protection	permanent				
Reverse polarity protection	no damage, but also no function				
Electromagnetic compatibility	emission and immunity according to EN 61326				
Mechanical stability					
Vibration	10 g RMS (20 ... 2000 Hz)				
Shock	100 g / 11 msec				
Materials					
Pressure port / diaphragm	stainless steel 1.4548 (17-4 PH)				
Housing	standard: stainless steel 1.4301 (304)				
Seals (media wetted)	none (welded version)				
Media wetted parts	pressure port, diaphragm				
IS-protection (only for 4 ... 20 mA / 2-wire)					
Approval DX17-DMP 304	zone 0: II 1G Ex ia IIC T4				
Safety technical maximum values	U _i = 28 V, I _i = 93 mA, P _i = 660 mW				
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar zone 1 and higher: -25 ... 70 °C				
Connecting cables (by factory)	cable capacity: signal line/shield as well as signal line/signal line: 160 pF/m cable inductance: signal line/shield as well as signal line/signal line: 1 µH/m				
Miscellaneous					
Insulation strength / resistance	standard: insulation strength 100 MΩ @ 35 V IS-version: insulation resistance 100 MΩ @ 35 V _{DC} 100 MΩ @ 500 V _{AC} (relative to housing)				
Current consumption	2-wire signal output current: max. 28 mA 3-wire signal output voltage: max. 15 mA				
Weight	approx. 260 g				
Installation position	any				
CE-conformity	EMC Directive: 2004/108/EC Pressure Equipment Directive: 97/23/EC (module A)				


DMP 304

Ultra High Pressure Transmitter


Technical Data

Wiring diagrams

2-wire-system (current)

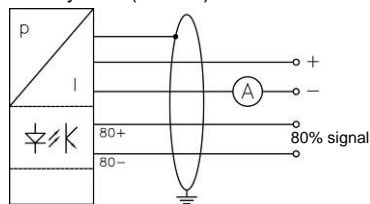

3-wire-system (voltage)

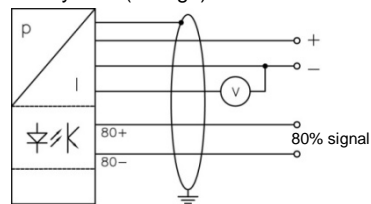


Pin configuration

Electrical connections	Binder 723 (5-pin)	M12x1 (4-pin)	ISO 4400	cable colours (DIN 47100)
Supply +	3	1	1	wh (white)
Supply -	4	2	2	bn (brown)
Signal + (only for 3-wire)	1	3	3	gn (green)
Shield	5	4	pin	gn/ye (green / yellow)


Pin configuration MIL / Bendix plug (optional)

Version	Pin A	Pin B	Pin C	Pin D	Pin E	Pin F
2-wire current signal 4 ... 20 mA	supply +/- signal +	supply -/ signal -	-	-	calibration +	calibration -
3-wire	signal +	supply -/ signal -/ calibration -	supply +	-	-	calibration +


Electrical connections (dimensions in mm)




Binder series 723 (IP 67)




M12x1 4-pin (IP 67)




cable outlet
with PVC-cable (IP 67)²



ISO 4400 (IP 65)



cable outlet (IP 67)³




MIL / Bendix plug
(Typ PT 02 A 10-6 P)

² standard: 2 m PVC-cable without air tube (permissible temperature: -5 ... 70 °C)

³ different cable types and lengths available, permissible temperature depends on kind of cable


Mechanical connections (dimensions in mm)

Standard

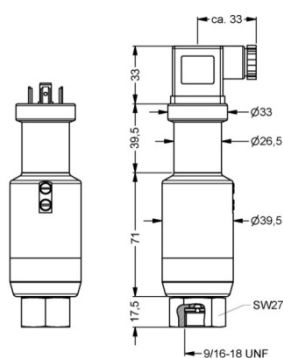


9/16" UNF internal thread

Option

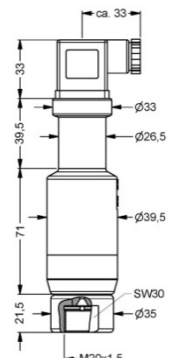

M20x1,5 internal thread

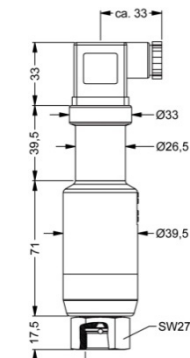

M16x1,5 internal thread

This data sheet contains product specification; properties are not guaranteed. Subject to change without notice.

Ordering code DMP 304

DMP 304

□	□	□	-	□	□	□	□	-	□	-	□	□	-	□	□	□	-	□	□	□
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pressure																			
	gauge	2	2	0															
Input		[bar]																	
	2 000				2	0	0	4											
	4 000				4	0	0	4											
	5 000				5	0	0	4											
	6 000				6	0	0	4											
	customer				9	9	9	9											consult
Output																			
	4 ... 20 mA / 2-wire							1											
	Intrinsic safety 4 ... 20 mA / 2-wire							E											
	0 ... 10 V / 3-wire							3											consult
	customer							9											consult
Accuracy																			
standard	0.5 %							5											
option	0.25 %							2											consult
	customer							9											consult
Electrical connection																			
	Male and female plug ISO 4400								1	0	0								
	Male plug Binder series 723 (5-pin)								2	0	0								
	Cable outlet with PVC-cable ¹								T	A	0								
	Cable outlet ²								T	R	0								
	Male plug M12x1 (4-pin), metal								M	1	0								
	MIL-/Bendix (Typ PT 02 A 10-6 P)								B	G	0								consult
	customer								9	9	9								consult
Mechanical connection																			
	9/16" UNF internal thread								V	0	0								
	M16x1.5 internal thread								P	0	0								
	M20x1.5 internal thread								D	2	8								
	customer								9	9	9								consult
Special version																			
	adjustable														0	4	1		
	customer														9	9	9		consult

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C), optionally cable with ventilation tube

² different cable types and lengths deliverable (permissible temperature depends on kind of cable)