



TR Automatyka Sp. z o. o.

ul. Lechicka 14 ; 02-156 Warszawa

Series
PDPS

Tel. (+48 022) 886 10 16

Fax. (+48 022) 846 50 37

www.trautomatyka.pl

biuro@trautomatyka.pl


Compact Economic Differential Pressure Switch

Low Pressures down to 0.07 in w.c.



PRESSURE

Differential Pressure Switches

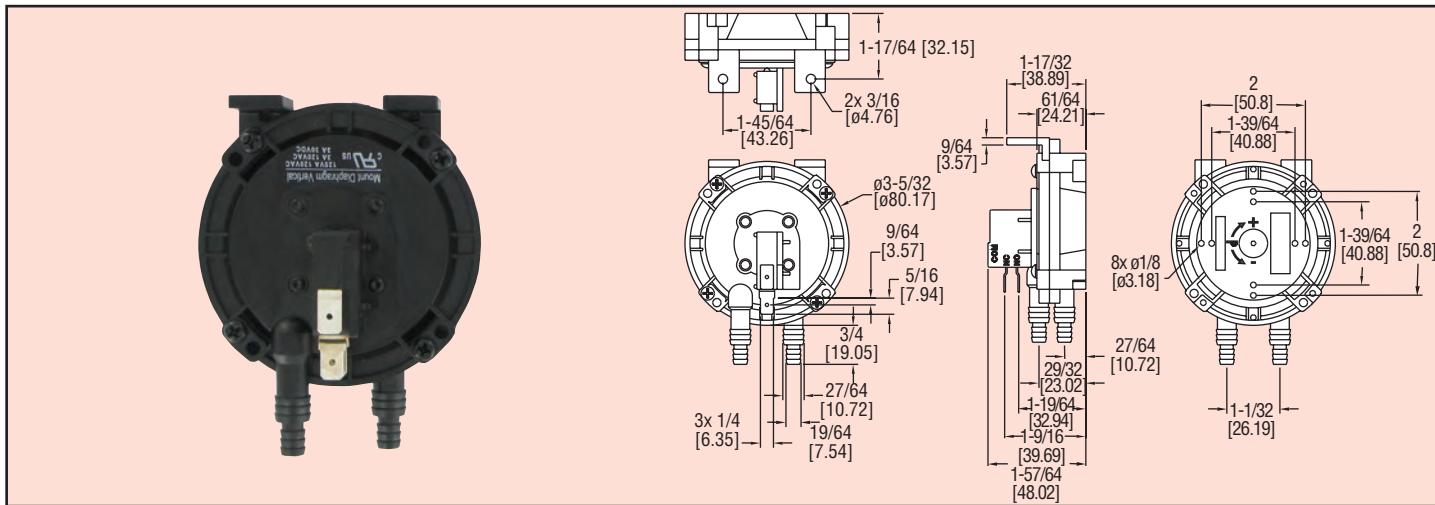

The Series PDPS's large diameter diaphragm and snap action switch make it dependable and ideal for OEM applications. The Series PDPS Pressure Switches are available for pressure, vacuum, and differential applications and are factory preset for pressures from 0.07" of w.c. to 1.0" of w.c. with full-scale repeatability of ± 0.02 " of w.c. Other features of the PDPS pressure switch include standard multi-barb port connections, inherent mounting and quick disconnect terminals, which make the Series PDPS perfect for many OEM applications.

SPECIFICATIONS

Service: Air and compatible gases.

Wetted Materials: Polyphenylene oxide-styrene housing, fluorosilicon diaphragm, stainless steel spring.

Temperature Limits: -40 to 185°F (-40 to 85°C).

Operating Pressure: 0.07" w.c. to 1.0" w.c.

Repeatability: ± 0.02 " of w.c.

Burst Pressure: 3.5 psi (0.241 bar).

Proof Pressure: 1.0 psi (0.069 bar).

Switch Type: Conventional snap action switch.

Electrical Rating: 5 A @ 125/250 VAC.

Process Connections: Multi-barb port connections for 1/4" and 3/8" I.O. tubing.

Mounting Orientation: Mount switch with diaphragm in a vertical position unless customer has specified otherwise.

Set Point Adjustment: Set point adjusted at factory.

Agency Approvals: UL-508 industrial controls; UL-353 pilot duty requirements; BS EN 1854: 1997.

Weight: 2.7 oz (76.5 g).

